

ISTRUZIONI PER IL MONTAGGIO INSTALLATION INSTRUCTION

FISSARE LA STAFFA (1) AL SOFFITTO E FARE IL COLLEGAMENTO ELETTRICO.
FISSARE IL ROSONE (2) CON LE VITI (3) ALLA STAFFA (1). (*) PER I MODELLI DA
INCASSO LA STAFFA (1) VA FISSATA AL SOFFITTO PORTANTE ED IL ROSONE
VA PORTATO A FILO DEL CONTROSOFFITTO USANDO CANNELLE (*) DI
LUNGHEZZA OPPORTUNA. AGGANCIARE TUTTI I VETRI A COMINCIARE DALLA
CORONA a ED IN SEQUENZA b-c-d.

FIX THE STIRRUP (1) TO THE CEILING AND WIRE THE ELECTRICAL CONNECTION.
FIX THE CANOPY (2) WITH THE NUTS (3) TO THE STIRRUP (1). (*) FOR RECESSED
MODELS, THE STIRRUP (1) TO THE STRUCTURAL FRAME, AND THE CANOPY (2)
TO THE CROSS FURRING CEILING, BY MEANING OF NIPPLES (*) MADE TO
MEASURE. HOOK UP ALL THE GLASS RODS STARTING FROM a AND IN
SEQUENCE b-c-d.




DECLARATION OF COMPLIANCE

AXOLIGHT DECLARES THAT THE PRODUCT IS IN COMPLIANCE WITH THE EUROPEAN
STANDARD EN 60.598-1.

MODELLO

PL AURA G
PL AURA G 30

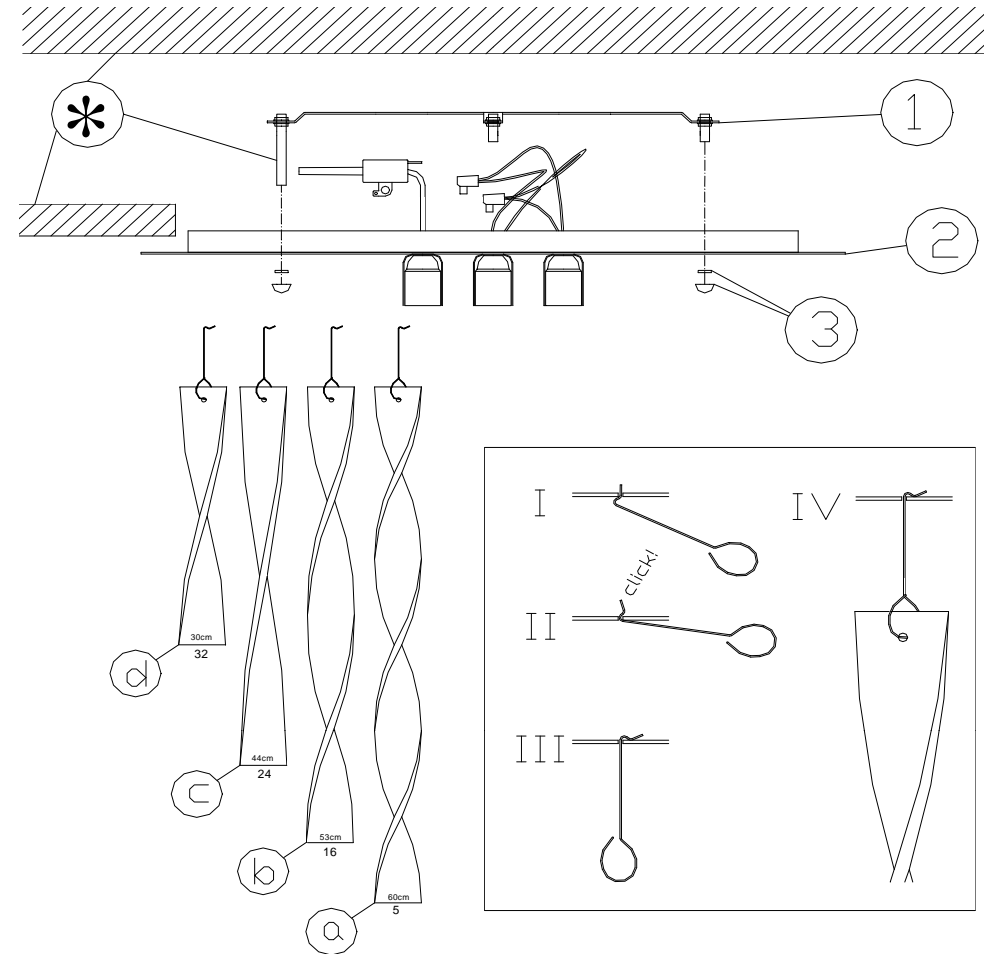


DATI TECNICI / TECHNICAL DATA

SIZE:

h 69cm, l 75x75cm (Aura G)
h 40cm, l 75x75cm (Aura G30)

da incasso/recessed
foro/hole
66x66cm



BULBS:

4xQT32 (E27) max 4x100W



Axolight