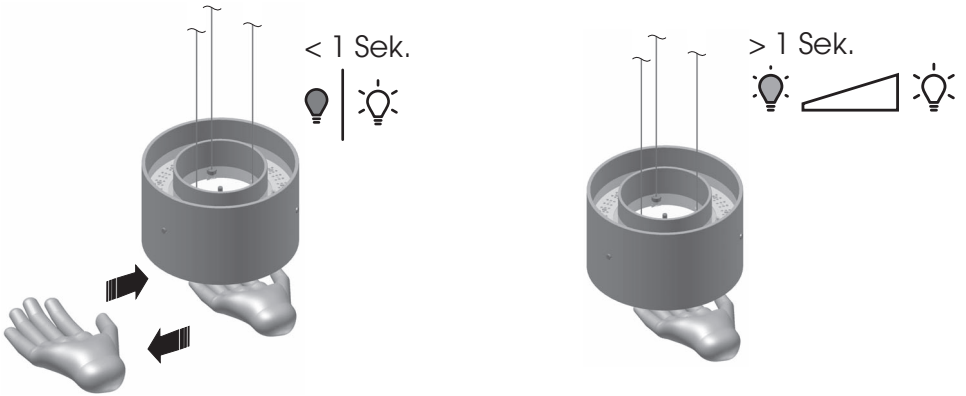

Tunable White
2200 – 5000 K

Die Lichtfarbe kann ausschließlich über die Casambi APP gesteuert werden.

The colour of light can only be controlled by Casambi APP.

Technische Daten
Funk:
Frequenz: 2,4 GHz
max. Leistung: +4 dBm (< 2,6 mW)

Voraussetzungen für den Betrieb
- SMART DEVICE mit iOS oder Android*
- CASAMBI APP

Eine detaillierte Bedienungsanleitung zur CASAMBI APP finden Sie unter www.oligo.de oder www.casambi.com

* Mindestvoraussetzungen:
iPhone 4s, iPad 3, iPod Touch 5
Android 5.0 mit Bluetooth 4.0 BLE

Technical Data
Radio:
Frequency: 2,4 GHz
max. power: +4 dBm (< 2,6 mW)

Requirements for operation
- SMART DEVICE with iOS or Android*
- CASAMBI APP

For detailed instructions regarding the CASAMBI APP, see www.oligo.de or www.casambi.com

* Minimum requirements:
iPhone 4s, iPad 3, iPod Touch 5
Android 5.0 with Bluetooth 4.0 BLE

Contains FCC ID: 2ALA3-CBM002A Contains IC: 22496-CBM002A

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

This device complies with Industry Canada's licenseexempt RSSs. Operation is subject to the following two conditions:
(1) This device may not cause interference; and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:
(1) l'appareil ne doit pas produire de brouillage;
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

TROFEO TW

PENDANT

OLIGO Lichttechnik GmbH
Tannenweg 1
DE - 53757 Sankt Augustin
Germany
www.oligo.de
info@oligo.de

Art.-Nr. / Item-No.
G42-886-20-XX

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse F

D	Leuchtmittel nicht ersetzbar
GB	Bulbs not replaceable
NL	Lamp niet vervangbaar
F	Ampoules non remplaçables
I	Lampadina non sostituibile
ES	Bombillas no reemplazables
P	Lâmpada não substituível
DK	Ljuskällorna kan inte bytas ut

S	Bulb inte utbytbara
N	Lyspærer kan ikke skiftes ut
FI	Valistusvälinettä ei voi vaihtaa
TR	Ampuller değiştirilemez
PL	Źródło światła nie jest wymienne
GR	Οι λαμπτήρες δεν αντικαθίστανται
RUS	Светодиоды не поддаются замене
UAE	تجهيزات الإضاءة غير قابلة للاستبدال

	AC100-240V/50-60 Hz DC 24V SELV	**max. 18W** *Standby: <100mW*	**2200-5000K / 1000lm CRI >90**
D	Spannung	Belastung	Lampe
GB	Voltage	Loading	Bulb
NL	Spanning	Belasting	Verlichtingsmiddel
F	Tension	Charge	Ampoule
I	Tensione	Carico	Sorgente luminosa
ES	Tensión	Carga	Lámpara
P	Tensão	Carga	Lâmpada
DK	Spænding	Belastning	Pære
S	Spänning	Belastning	Ljuskälla
N	Spenning	Fatning	Lampe
FI	Jännite	Kuormitus	Lamppu
TR	Gerilim	Yük	Lamba
PL	Napięcie	Oprawka	Lampa
GR	Τάση	Υποδοχή	Λαμπτήρας
RUS	Напряжение	Нагрузка	Лампочка
UAE	الجهد الكهربي	الدواة	المصباح

incl.

IEC 62471 (EN 62471)
RG1 - LOW RISK

CASAMBI

MO51843 Ver.1 - 11-21

A

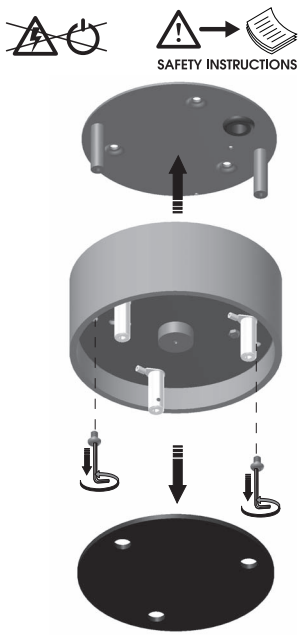

B

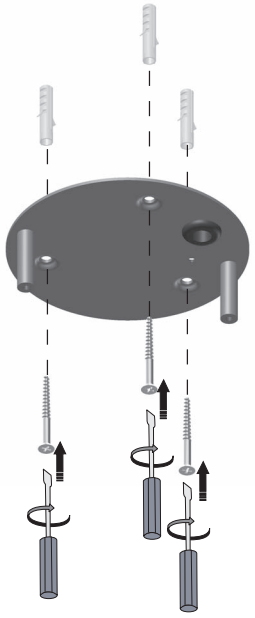

C

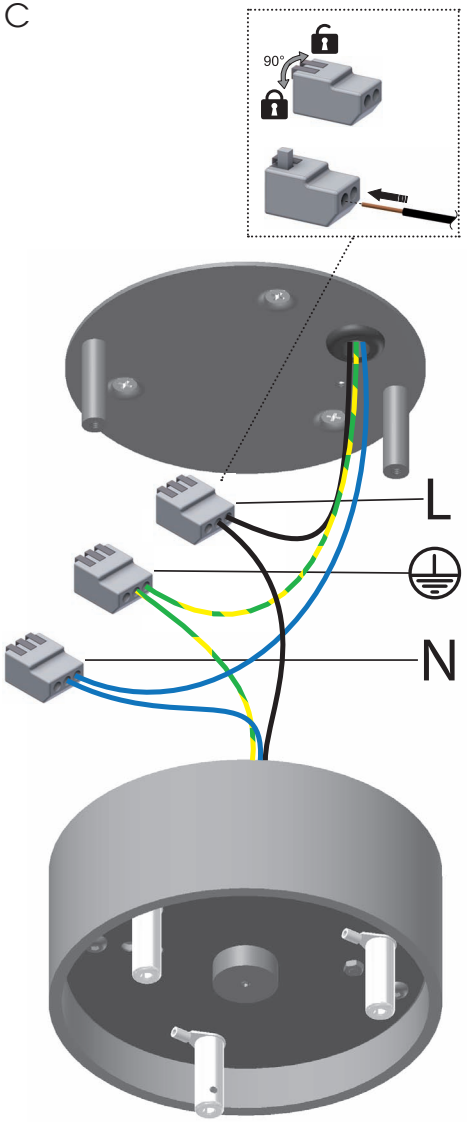

D

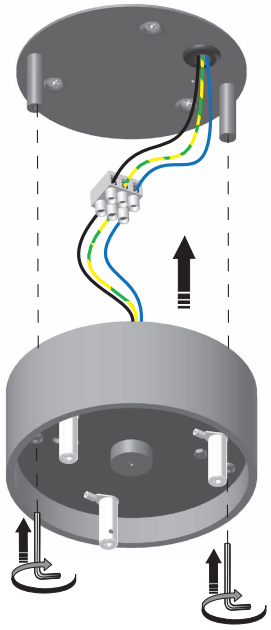

E

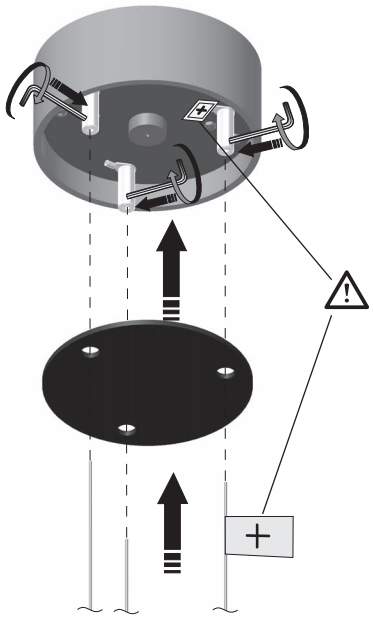
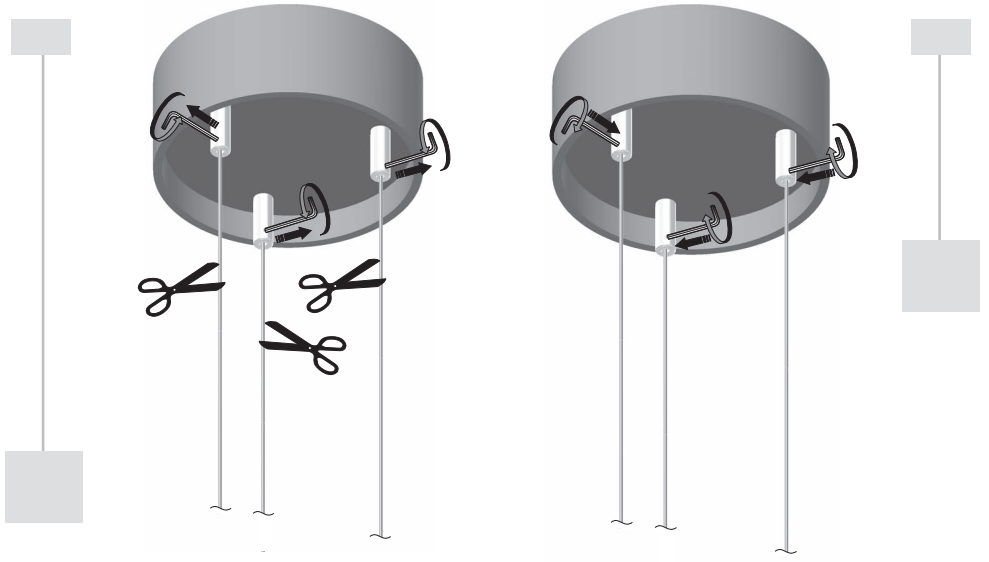
F